

PUSH AROUND ELECTRIC SCISSOR LIFT



**X**

**XP5 E-XLP5 E**



**AIRO**

SAFELY, HIGHER.

**XP5 E DUAL-XLP5 E DUAL**

MADE IN ITALY



## PERFORMANCES

The XP-XLP range is the ideal cost-effective solution for a multitude of tasks including building, construction, painting and decorating, cleaning, general and building maintenance.

## ADVANTAGES

The XP-XLP range is only 0.7m wide and with a transport height of less than 2m it passes through standard doors and into people lifts. The DUAL version offers the possibility of maintenance and inspection work on suspended ceilings.

## VALUE

40 years of experience in design and manufacturing are a guarantee of reliability and durability.



# XP5 E - XLP5 E XP5 E DUAL - XLP5 E DUAL



Dealer




## Technical data

**XP5 E** **XLP5 E**

**XP5 E DUAL** **XLP5 E DUAL**

**XP5 E - XP5 E DUAL** **XLP5 E - XLP5 E DUAL**

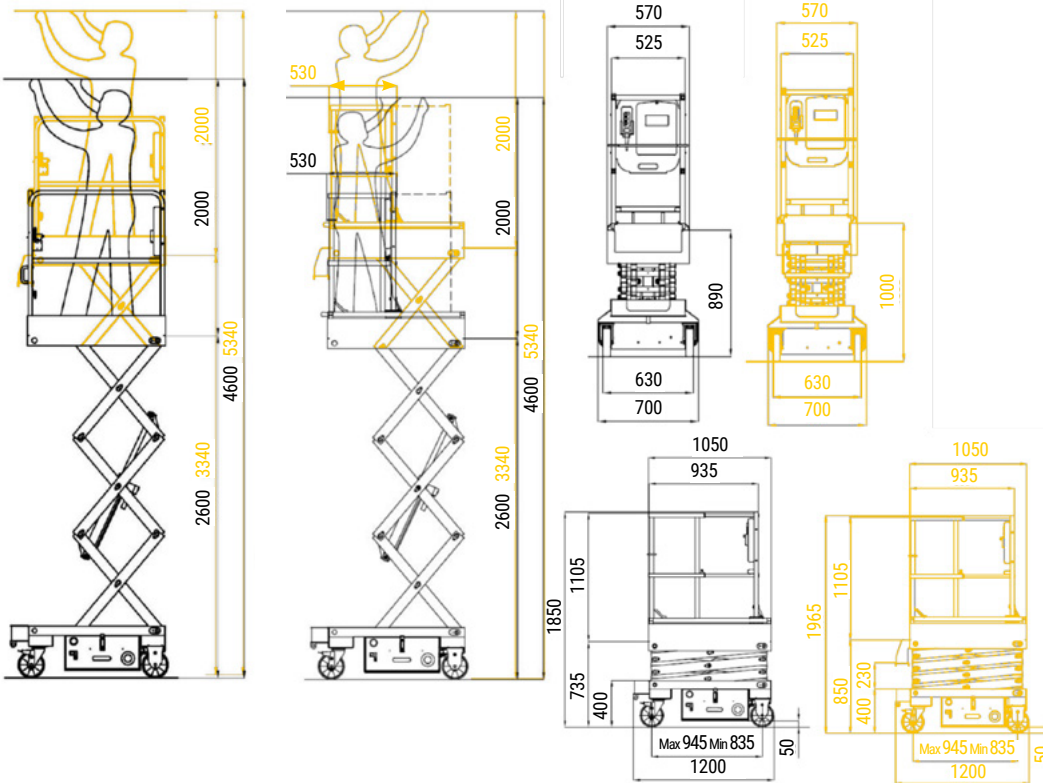

TECHNICAL SPECIFICATIONS		XP5 E	XLP5 E	XP5 E DUAL	XLP5 E DUAL
Max. working height	mm	4600	5350	4600	5350
Max. platform height	mm	2600	3350	2600	3350
Total capacity /n° of persons	kg	250 / 1	250 / 1	250 / 1	250 / 1
Lifting time	s	20	20	20	20
Lowering time	s	27	27	27	27
Battery	V/Ah(C5)	12 / 85	12 / 85	12 / 85	12 / 85
Battery charger	V/A	12/10 HF	12/10 HF	12/10 HF	12/10 HF
Inclination long. /trav.	°	1,5°/1,5°	1,5°/1,0°	1,5°/1,5°	1,5°/1,0°
Steering	°	360	360	360	360
Non-marking polyurethane castors	mm	Ø 200 x 50	Ø 200 x 50	Ø 200 x 50	Ø 200 x 50
Total weight	Kg	360	430	360	430

## Standard Version

- Electro-hydraulic lifting
- Platform control panel including holster
- Platform capacity 250 kg / 1 person
- Documentbox on platform
- Platform for internal use
- Maintenance-free GEL/AGM battery
- Easy maintenance of components in one sliding box
- Steering by free castor wheels with pedal parking brakes
- Fixed wheels with automatic parking brake
- Tilt sensor, Voltmeter and Hour Meter and low voltage battery protection
- Electric scissor arm guard
- Grease nipples on scissor pins
- lateral forklift pockets, tie down points
- Manual emergency lowering
- Maintenance safety bar
- EC Declaration of Conformity CE

## DUAL version only

- Work platform reducible to min. dim. of 530x570mm\*
- Easy platform access through saloon door

## Options and accessories

- 230V power line on platform
- 230V power line on platform with circuit breaker

\* **kit Dual available separately as a retrofit for XP5E/XLP5E versions**

Tigieffe Srl follows a policy of continuous product improvement. Photographs used may represent equipment including accessories and options. Specifications are indicative and subject to change without notice. Some accessories or national standards may result in an increase in weight. Technical specifications may vary according to national standards or with the addition of optional equipment.



**AIRO by TIGIEFFE S.r.l.**  
Via Villa Superiore, 82 - 42045 Luzzara (RE) - Italy  
Ph. +39 0522 977365 - Fax: +39 0522 977015  
info@airo.com - www.airo.com