


# ZOOMLION

## ZS2632DC/ZS0808DC

### BATTERY POWERED SCISSOR LIFT

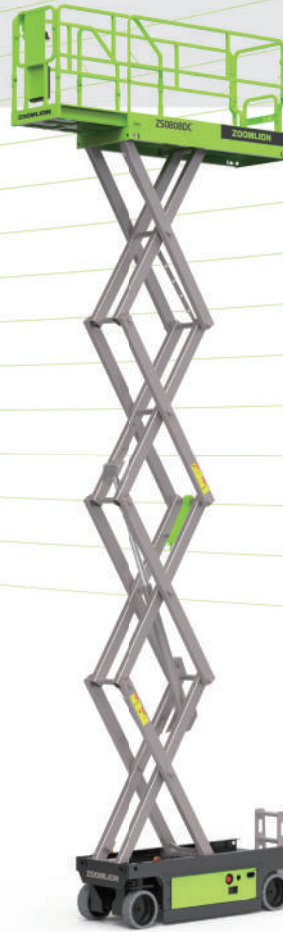

## FEATURES

### Standard Features

- Proportional controls
- All motion alarm
- Fold-down handrails
- Flashing amber beacon
- Self-closing entry gate
- Emergency descent system
- Active pothole protection system
- Hour meter
- Forklift pockets
- Horn
- Drivable at full height
- Scissor maintenance prop
- Charging protection system
- Extension deck (unidirectional)
- Autobrake system
- On-board diagnostic
- Emergency stop button
- Over tilt protective system
- AC power to platform
- Load sensing system
- Maintenance-free batteries

### Accessories & Options

- Li-ion batteries for option with 5-year warranty
- Air line to platform
- Platform work lights
- Overhead protection bar

## HIGHLIGHTS

### High Performance

- Efficient electric direct drive system
- Greater platform capacity with better performance on-the-job
- Front-wheel drive and brake offer mobility and versatility

### Easy Maintenance & Service

- Common components and modular design, easy to maintenance
- Bilateral swing-out trays (battery & hydraulic), simple to service
- Robust & build to last, reliable, and safe




**ACCESS WITH ZOOMLION GREEN**



# ZOOMLION

## ZS2632DC/ZS0808DC

Model	ZS2632DC/ZS0808DC
<b>Size</b>	
Work Height	32ft 10in (10.00m)
A-Platform Height-Elevated	26ft 3in (8.00m)
B-Platform Height-Stowed	4ft 2in (1.26m)
C-Platform Length	7ft 7in (2.30m)
D-Platform Width	2ft 8in (0.81m)
Platform Extension	3ft (0.91m)
E-Overall Height (Rails Up)	7ft 11in (2.4m)
Overall Height (Rails Down)	6ft 3in (1.9m)
F-Overall Length	8ft 2in (2.49m)
G-Overall Width	2ft 8in (0.81m)
H Wheelbase	6ft 1in (1.85m)
I-Ground Clearance (Stowed)	4.5in (0.11m)
J-Ground Clearance (Raised)	0.75in (0.02m)
<b>Performance</b>	
Platform Capacity	510lb (230kg)
Capacity on Deck Extension	250lb (113kg)
Max. Number of Workers	2
Drive Speed (Stowed)	2.5mph (4km/h)
Drive Speed (Raised)	0.5mph (0.8km/h)
Turning Radius (Inside)	4in (0.1m)
Turning Radius (Outside)	6ft 11in (2.1m)
Lifting Motor	24V/3.3KW
Drive Motor	24V/2x0.75KW
Up/Down Time	31s/40s
Gradeability	25%(14°)
Max. Working Slope (Lateral/Vertical)	1.5°/3°
Control	Proportional Control
Drive	Front Wheels
Brake	Front Wheels
Tire	Ø15inx5in (Ø381mmx127mm)
<b>Power</b>	
Type	Lead-acid batteries (Li-ion batteries for option)
Battery	4x6V/225Ah
Charger	24V/30A
<b>Weight</b>	
Gross	4610lb (2090kg)

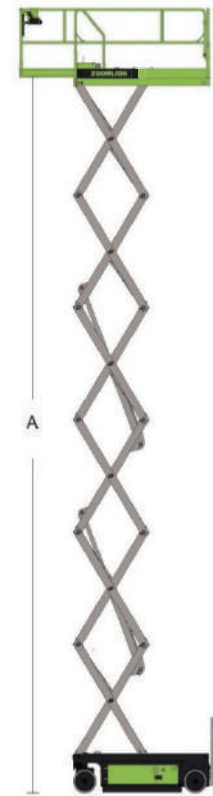

AJ Access Platforms Ltd, Pill Way, Severn Bridge Industrial Estate,  
Caldicot Monmouthshire, NP26 5PU, UK  
Phone: +44 (0) 1291 421 155  
Email: [info@accessplatforms.com](mailto:info@accessplatforms.com), [sales@accessplatforms.com](mailto:sales@accessplatforms.com)  
Web: [www.accessplatforms.com](http://www.accessplatforms.com)

[Get Pricing](#)

